


S. 12-406

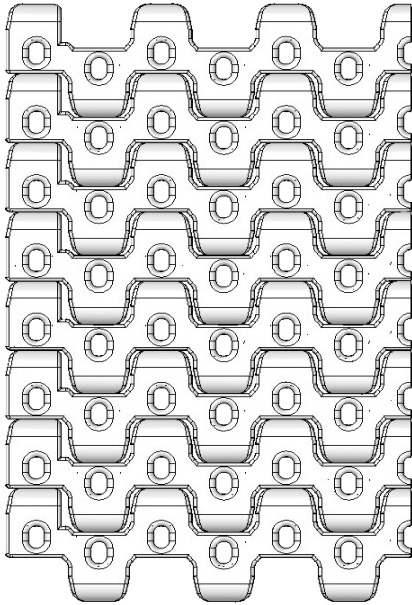

Belt data		
Materials	Max. belt pull kg/m width	Belt weight kg/m ²
Polyethylene (PE)	600	4,5
Polypropylene (PP)	800	4,5
Polyacetal (POM)	1450	6

Belt surface: Perforated flat top.
Open area: 8%. Biggest opening 4 x 2,5 mm.
Strength: Ideal choice for light transportation.
Material/colour: PE/nat, PP/white and grey. POM/blue
Cleanability: Excellent. FSIS
Accessories: 25 mm flights, friction top.
Application: Cooling belt for small (14 mm) nose bar.
Standard widths: Increments of 20 mm, e.g. 100, 120 mm etc.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
10	50	42	33	16	20			
19	84	76	67	16	20/25/30/40		25/40	1½
24	104	96	87	16	20/25/30/40		25/40	1½
28	120	112	103	16	20/25/30/40		25/40	1½

