


S. 12-408 F/2 component

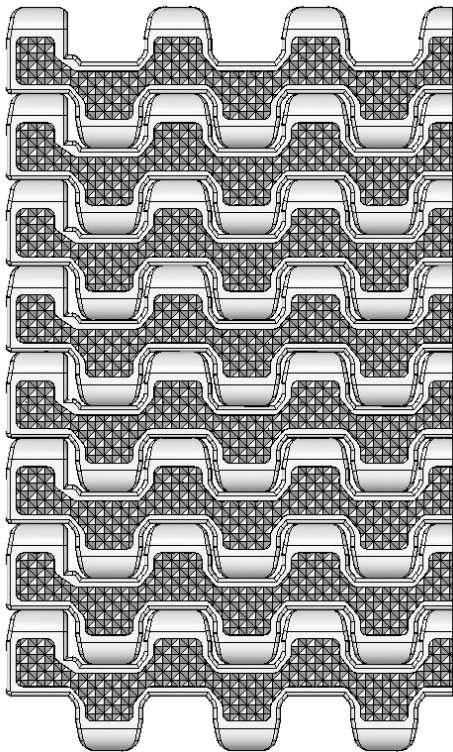

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Copolymer:	750	6

Belt surface: Flat top with friction surface.
Open area: Closed.
Strength: Ideal choice for light transportation.
Colour: nat/white.
Cleanability: Excellent. FSIS
Accessories: 25 mm flights
Application: Transport of goods on a slightly inclined conveyor. Runs on 14 mm nose bar.
Standard widths: Increments of 20 mm, e.g. 100, 120 mm etc

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
10	52	42	33	16	20			
19	86	76	67	16	20/25/30/40		25/40	1½
24	106	96	87	16	20/25/30/40		25/40	1½
28	122	112	103	16	20/25/30/40		25/40	1½

