


## S. 12-438

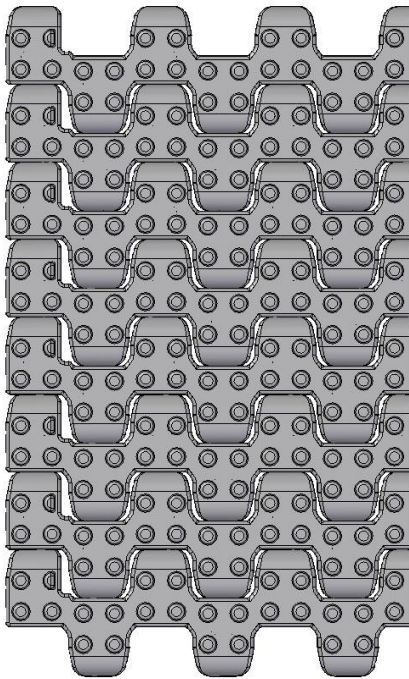

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	600	4,5
Polypropylene (PP)	800	4,5
Polyacetal (POM)	1450	6

Belt surface:	Structure top with 2 mm nubs.
Open area:	Closed.
Strength:	Ideal choice for light transportation.
Material/colour:	PE/nat, PP/white and grey. POM/blue
Cleanability:	Excellent. FSIS
Accessories:	25 mm flights, friction top.
Application:	Ideal for poultry, meat and seafood industry. Cooling belt for small (14 mm) nose bar.
Standard widths:	Increments of 20 mm, e.g. 100, 120 mm etc.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
10	53	42	33	16	20			
19	87	76	67	16	20/25/30/40		25/40	1½
24	107	96	87	16	20/25/30/40		25/40	1½
28	123	112	103	16	20/25/30/40		25/40	1½

