


## S. 25-402

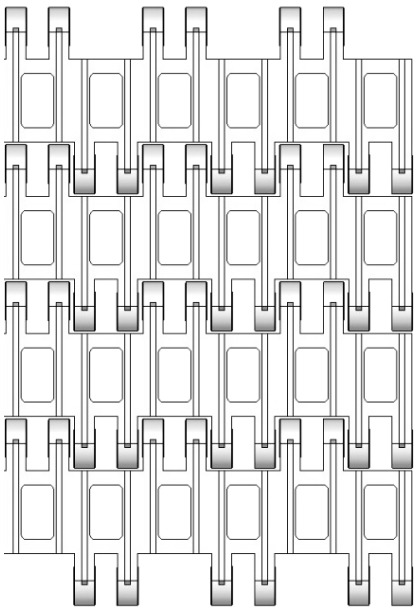

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	700	6
Polypropylene (PP)	1120	6
Polyacetal (POM)	1500	7,5

**Belt surface:** Raised ribs, 5 mm.  
**Open area:** 29 %. Biggest opening 6 x 10 mm.  
**Strength:** Ideal for medium weight transportation.  
**Material/colour:** PE/nat, PP/white and grey. POM/blue.  
**Cleanability:** Excellent. FSIS  
**Accessories:** 3, 25 and 50 mm flights. 25 and 50 mm side guards, friction top.  
**Application:** Transport of products which demand a low contact surface.  
**Standard widths:** Increments of 25 mm, e.g. 100, 125 mm etc  
**Non standard widths:** Increments of 12,5 mm, e.g. 100, 112,5 mm etc  
 Note: Non standard widths will have cut edge on one side.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	58	45	36	20	20			
8	75	61	52	20	20/25	1	25	
12	109	95	86	20	20/25/30/40	1/1¼	25/40	1½
20	174	160	151	35	25/30/40	1/1¼	25/40/60	1½/2½

